

Alba

Low Bay



High and Low Bay



A robust low profile LED luminaire designed for 4-10m mounting heights. A rigid steel construction with clear polycarbonate or opal PETG diffuser and protective steel wire guard. Designed for rigid conduit and trunking (via stand-off brackets) mounting. Suitable for sports halls, tennis courts and industrial areas.

Rigid mild steel construction

120mm (including wire guard) low profile design

Surface/trunking mounting brackets available

Presence/absence/daylight dimming sensors available

50,000 hours life (L70)

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M31HJ

E&OE



Ordering Information

| | Code | Weight (kg) | Total Watts | Total Lumens | Luminaire Efficacy | IP Rating | Life | Warranty |
|--|-------------------|-------------|-------------|--------------|--------------------|-----------|----------|----------|
| | 113W SHA113T440CP | 5.9 | 113 | 12914 | 113 | IP20 | 50,000hr | 5 year |
| | 170W SHA170T440CP | 5.9 | 170 | 19372 | 114 | IP20 | 50,000hr | 5 year |
| | 226W SHA226T440CP | 5.9 | 226 | 25829 | 114 | IP20 | 50,000hr | 5 year |


Code Builder

Emergency – Add EM
 Standard PIR sensor – Add MB
 High sensitivity PIR – Add HS
 Dali dimming – Add DA
 Opal diffuser – Add GF
 Self-test emergency – Add STEM
 Colour temperature options available

Dimensions

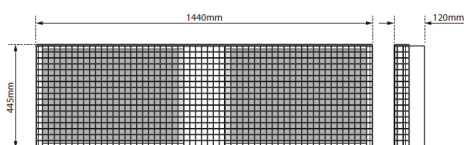

Photometrics

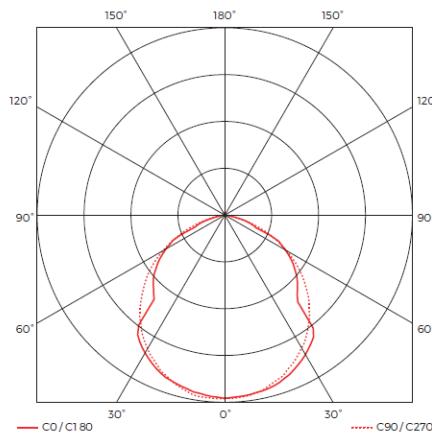

Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP20 Technical Specification.

Standards

The Alba LED range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operations

Designed for operation in an interior environment. Ambient temperature range: 0° to +25°C.
 230V 50Hz nominal input voltage.

Specification

A robust low profile LED luminaire designed for 4-10m mounting heights. A rigid steel construction with clear polycarbonate or opal PETG diffuser and protective steel wire guard. Designed for rigid conduit and trunking (via stand-off brackets) mounting. Suitable for sports halls, tennis courts and industrial areas.

Version 1 October 2018

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
 F: 0161 274 3731
 E: sales@hilclare.com

15 Carnarvon Street
 Manchester
 M3 1HJ

E&OE