

Evita

Surface Mounted IP54, Bulkhead



A low cost surface mounted IP54 decorative LED luminaire. Constructed from a white polycarbonat circular base, with opal polycarbonat diffuser. Suitable for use in corridors, reception areas, bathrooms and other areas in commercial buildings.

IP54

Integral emergency versions available

Semi-recessing kit available

Opal diffuser

30,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ


Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
14W	DLE14LED40	2.3	14	1000	67	IP54	30,000hr	3 year


Code Builder

Emergency - Add EM
Semi recessing kit available

Dimensions

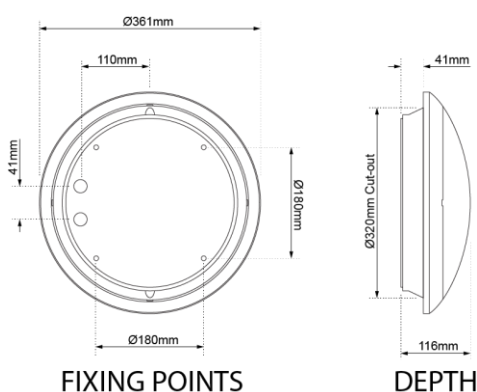

Photometrics

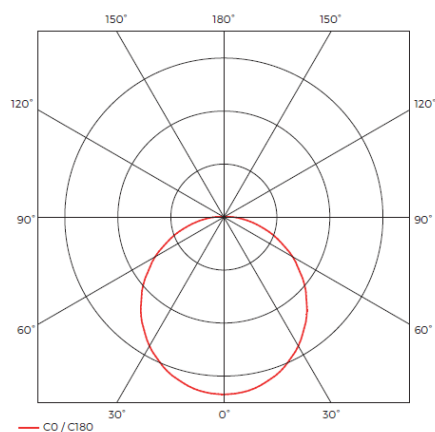

Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP54 Technical Specification.

Specification

A low cost surface mounted IP54 decorative LED luminaire. Constructed from a white polycarbonate circular base, with opal polycarbonate diffuser. Suitable for use in corridors, reception areas, bathrooms and other areas in commercial buildings.

Standards

The Evita range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1

Operations

Designed for operation in an interior environment.
Ambient temperature range:
0° to +25°C.
230V 50Hz nominal input voltage.

Version 1 October 2018

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ

E&OE