

Otara

Clean Room



This luminaire is ideal for clean room, laboratory, and food preparation areas.

Various diffuser options

Integral emergency versions available including self-test option

IP65 from front of fitting, IP44 to rear when mounted in ceiling

Integral driver

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M31HJ


Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
33W	CAO33CF40GFPU	6.3	33	3053	89	IP65 Front only	50,000hr	5 year
33W	CAO33CF40GF	6.3	33	3053	89	IP65 Front only	50,000hr	5 year
44W	CAO44CF40GFPU	6.3	44	4071	88	IP65 Front only	50,000hr	5 year
44W	CAO44CF40GF	6.3	44	4071	88	IP65 Front only	50,000hr	5 year


Code Builder

Dali/switch dimming - Add DA
 Emergency - Add EM
 Self-test emergency - Add STEM
 Opal diffuser- Add GF
 Polycarbonate diffuser - Add CP
 Colour 3000K - Add 30

Dimensions



Photometrics

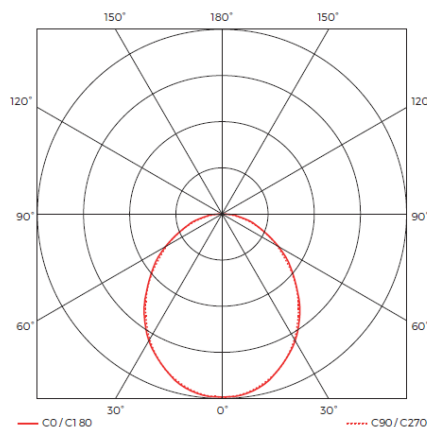

Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP65 Technical Specification.

Specification

This luminaire is ideal for clean room, laboratory, and food preparation areas.

Standards

The Otaru range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operations

Designed for operation in an interior environment. Ambient temperature range: 0°C to +25°C.
 230V 50Hz nominal input voltage.

Version 1 October 2018

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a pilot group company

T: 0161 274 3626
 F: 0161 274 3731
 E: sales@hilclare.com

15 Carnarvon Street
 Manchester
 M3 1HJ

E&OE