

# Paleta

## Adjustable



A range of recessed LED adjustable downlight luminaires. Suitable for use in foyers, meeting rooms, corridors and other areas in commercial buildings and retail shops.

High efficacy - LOR > 85%

Emergency and self-test options

Dimming options including DALI integration

80° vertical tilt

Average life > 50,000 hours (L70)

# HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626  
F: 0161 274 3731  
E: [sales@hilclare.com](mailto:sales@hilclare.com)

15 Carnarvon Street  
Manchester  
M3 1HJ


## Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
17W	PT1740HO8	1.5	17	1769	117	IP20	50,000hr	5 year
20W	PT2040HO8	1.5	20	1819	106	IP20	50,000hr	5 year
25W	PT2540HO8	1.5	25	2610	104	IP20	50,000hr	5 year
25W	PT2530HO8	1.5	25	2738	109	IP20	50,000hr	5 year
32W	PT3240HO8	1.5	32	3424	106	IP20	50,000hr	5 year
32W	PT3230HO8	1.5	32	3511	108	IP20	50,000hr	5 year


## Code Builder

Dali/switch dimming - Add DA

## Dimensions

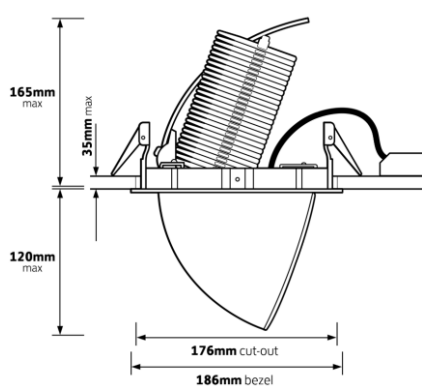

## Photometrics

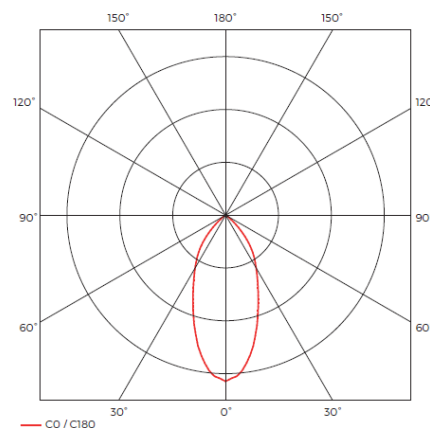

## Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP20 Technical Specification.

## Specification

A range of recessed LED adjustable downlight luminaires. Suitable for use in foyers, meeting rooms, corridors and other areas in commercial buildings and retail shops.

## Standards

The Paleta range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

## Operations

Designed for operation in an interior environment. Ambient temperature range: 0°C to +25°C. 230V 50Hz nominal input voltage.

Version 1 October 2018

**HILCLARE**  
LIGHTING MANUFACTURER  
— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626  
F: 0161 274 3731  
E: sales@hilclare.com

15 Carnarvon Street  
Manchester  
M3 1HJ

E&OE