

Palmito

Recessed



Recessed



A range of economical low profile recessed modular luminaires, suitable for use in many interior applications including offices, reception areas, meeting rooms and other commercial areas.

IP20

High transmission opal diffuser

Recessed lay-in mounting

3 hour maintained emergency versions available

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M31HJ

E&OE


Ordering Information

Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
23W RPX23T4LED40OP	4.3	23	2789	126	IP20	50,000hr	5 year

Code Builder

Dali/switch dimming - Add DA
 Emergency - Add EM
 Self-test emergency - Add STEM
 Colour 3000K - Add 30

Dimensions



Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP20 Technical Specification.


Standards

The Palmito range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1. Photometrically tested at UK laboratory.

Operations

Designed for operation in an interior environment. Ambient temperature range:
 Normal operation 0°C to +25°C.
 Emergency operation 0°C to +25°C.
 230V 50Hz nominal input voltage.

Photometrics

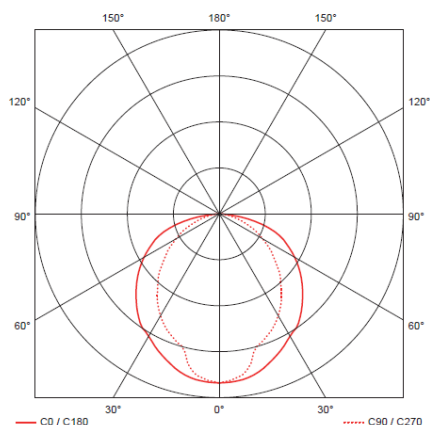

Specification

A range of economical low profile recessed modular luminaires, suitable for use in many interior applications including offices, reception areas, meeting rooms and other commercial areas.

Version 1 October 2018

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
 F: 0161 274 3731
 E: sales@hilclare.com

15 Carnarvon Street
 Manchester
 M3 1HJ