

# Rico

## Linear LED Battens



An IP20 LED luminaire with dry powder coated steel base, high transmission polycarbonate diffuser, polycarbonate end caps with surface and suspension mounting capabilities. Integral emergency versions available.

Simple installation

Polycarbonate end caps with 20mm diameter knockouts

Polycarbonate high transmission diffuser

4ft and 5ft options with high and low LED output

30,000 hours life

# HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626  
F: 0161 274 3731  
E: [sales@hilclare.com](mailto:sales@hilclare.com)

15 Carnarvon Street  
Manchester  
M3 1HJ

## Ordering Information


	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
24W	BTR244LED40	5	24	2690	112	IP20	30,000hr	3 year
45W	BTR454LED40	5	45	4906	107	IP20	30,000hr	3 year
30W	BTR305LED40	6	30	3270	109	IP20	30,000hr	3 year
60W	BTR605LED40	6	60	6351	104	IP20	30,000hr	3 year

## Code Builder


Emergency – Add EM

Batten PIR – Add MB

## Dimensions

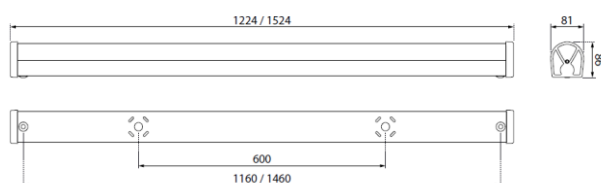

## Photometrics

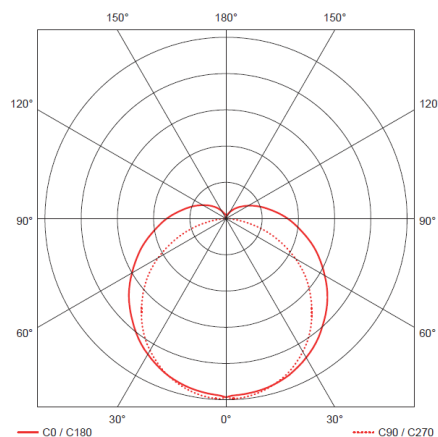

## Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP20 Technical Specification.

## Standards

The Rico range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

## Operations

Designed for operation in an interior environment. Ambient temperature range: 0°C to +25°C  
230V 50Hz nominal input voltage.

## Specification

An IP20 LED luminaire with dry powder coated steel base, high transmission polycarbonate diffuser, polycarbonate end caps with surface and suspension mounting capabilities. Integral emergency versions available.