

Vito

Linear Luminaire



Surface and Suspended Linear



A slimline range of direct and indirect luminaires with 25% uplight and 75% downlight components.

Simple installation

Ceiling or suspension mounting

Powder coated steel base

Opal diffuser

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ

E&OE


Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
34W	SSFLV345T440	6.8	34	2651	70	IP20	50,000hr	5 year
60W	SSFLV605T440	7.0	60	4570	70	IP20	50,000hr	5 year


Code Builder

Emergency - Add EM
 Self-test emergency - Add STEM
 Dali/switch dimming - Add DA
 Colour temperature options available

Dimensions

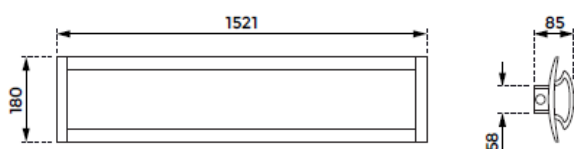

Photometrics

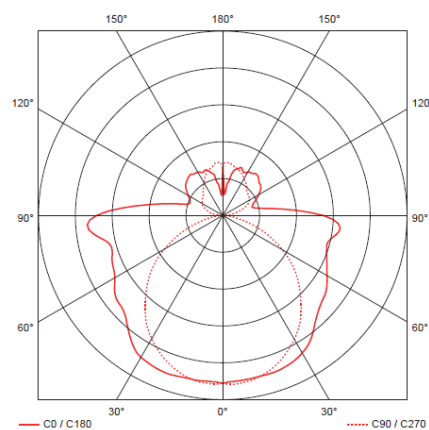

Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP20 Technical Specification.

Standards

The Vito range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operations

Designed for operation in an interior environment. IP Rating is only valid when luminaires are ceiling mounted.

Ambient temperature range:
 LED: 0°C to +25°C
 230V 50Hz nominal input voltage.

Specification

A slimline range of direct and indirect luminaires with 25% uplight and 75% downlight components.