

Brava

Linear, Batten



Corrosion Resistant



A range of durable, IP65 corrosion resistant battens. They are suitable for use in a wide variety of industrial and amenity applications, such as factories, warehouses and many exterior sheltered areas.

Clear diffuser

Single and twin versions available

A wide range of wattages available

Suitable for ceiling/surface mounting

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ

E&OE

Ordering information


(Luminaires supplied c/w clear prismatic diffuser)

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	Dim A (mm)	Dim B (mm)	IP Rating	Life	Warranty
19W	CRB1914T440	2.45	19	2501	128	104	1266	IP65	50,000hr	5 year
27W	CRB2714T440	2.45	27	3868	136	104	1266	IP65	50,000hr	5 year
34W	CRB3414T440	4.25	34	4648	131	104	1266	IP65	50,000hr	5 year
37W	CRB3724T440	4.25	37	4809	124	165	1266	IP65	50,000hr	5 year
54W	CRB5424T440	4.25	54	7438	130	165	1266	IP65	50,000hr	5 year
68W	CRB6824T440	4.25	68	9297	131	165	1266	IP65	50,000hr	5 year
23W	CRB2315T440	3.49	23	3126	129	104	1566	IP65	50,000hr	5 year
34W	CRB3415T440	3.49	34	4836	135	104	1566	IP65	50,000hr	5 year
38W	CRB3815T440	3.49	38	5436	137	104	1566	IP65	50,000hr	5 year
46W	CRB4625T440	6.55	46	6011	124	165	1566	IP65	50,000hr	5 year
68W	CRB6825T440	6.55	68	9297	130	165	1566	IP65	50,000hr	5 year
84W	CRB8425T440	6.55	84	11621	131	165	1566	IP65	50,000hr	5 year


Code Builder

- Opal diffuser - Add OP
- Emergency - Add EM
- Self-test emergency - Add STEM
- Dali/switch dimming - Add DA
- Microwave - Add MS9
- Microwave corridor version - Add MS9MD
- Batten PIR sensor - Add MB

Dimensions



Photometrics

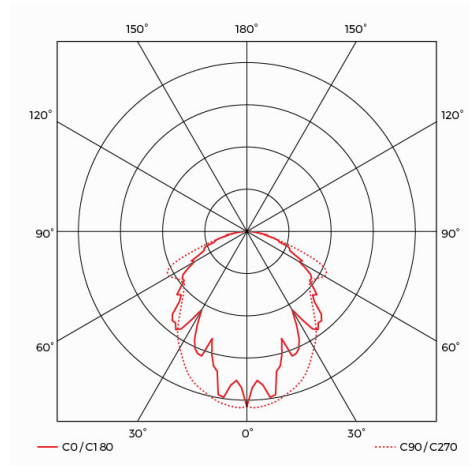

Classification of Protection

Against electric shock Class I protected with earthed metalwork. Against ingress of dust and moisture IP65 Technical Specification.

Operations

Designed for operation in an interior environment. IP Rating is only valid when luminaires are horizontally ceiling mounted, diffuser downwards. Ambient temperature range: 0°C to +25°C. 230V 50Hz nominal input voltage.

Standards

The Brava range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Specification

A range of durable, IP65 corrosion resistant battens. They are suitable for use in a wide variety of industrial and amenity applications, such as factories, warehouses and many exterior sheltered areas.

Version 1.2 November 2018

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a pilot group company

T: 0161 274 3626
 F: 0161 274 3731
 E: sales@hilclare.com

15 Carnarvon Street
 Manchester
 M3 1HJ

E&OE