

Madrid

Surface Mounted, Bulkhead



Exterior Surface Lighting



Exterior amenity wall light. Black polycarbonate visor, clear prismatic polycarbonate hinged diffuser, black die-cast aluminium base.

IP65 240 Volts 50Hz - nominal supply

Black visor to reduce light pollution

LED colour temperature - 4000K


Easy access to control gear and lamp

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ

E&OE

Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
17W	WLM17T440	3.80	17	1903	105	IP65	50,000hr	5 year
23W	WLM23T440	3.80	23	2457	98	IP65	50,000hr	5 year


Code Builder

Photocell - Add P


Emergency - Add EM

Self-test emergency - Add STEM

Dimensions

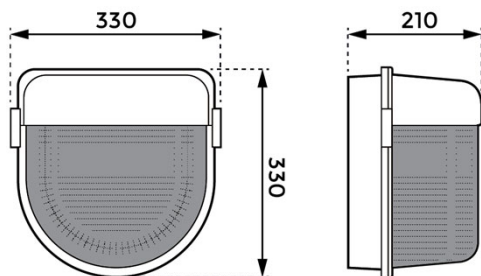

Photometrics

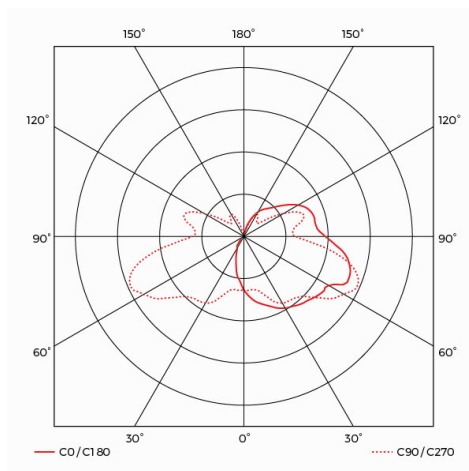

Classification of Protection

Against electric shock Class 1 protected with earthed gear tray & reflector. Against ingress of dust and moisture IP65 Technical Specification.

Standards

The Madrid range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operation

Designed for operation in an exterior environment. Ambient temperature range: 0°C to +25°C. 230V 50Hz nominal input voltage.

Specification


Exterior amenity wall light. Black polycarbonate visor, clear prismatic polycarbonate hinged diffuser, black die-cast aluminium base.

Version 1.2 November 2018

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ

E&OE