

Santos

Surface Mounted, Bulkhead



A range of surface mounted IP65 vandal resistant amenity luminaires. Constructed from a cast aluminium round base, with opal or clear prismatic polycarbonate diffuser. This light is suitable for walkways, corridors, doorways, emergency exit routes, stairwells and external sheltered areas.

IP65

Attractive compact design

Clear prismatic or opal polycarbonate diffusers

White or black diecast aluminium base

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ


Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
9W	DLS09T3BP40	3.1	9	1100	115	IP65	50,000hr	5 year
13W	DLS13T3BP40	3.1	13	1358	99	IP65	50,000hr	5 year
14W	DLS14T3BP40	3.1	14	1586	113	IP65	50,000hr	5 year
19W	DLS19T3BP40	3.1	19	1900	108	IP65	50,000hr	5 year


Code Builder

White base, clear diffuser – Add WP
 White base, opal diffuser – Add WO
 Black base, clear diffuser – Add BP
 Black base, opal diffuser – BO
 Emergency – Add EM
 Self-testing emergency – Add STEM
 Microwave sensor – Add MS9
 Dali/switch dimming – Add DA
 Security screws – Add SS

Dimensions



Photometrics

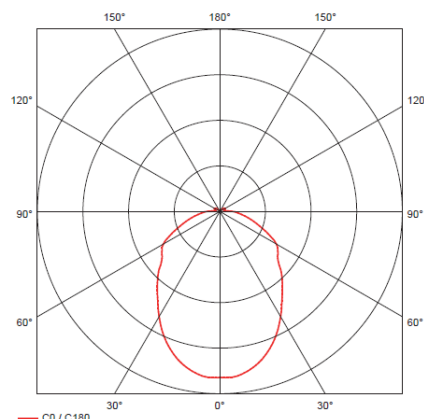

Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP65 Technical Specification.

Standards

The Santos range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operations

Designed for operation in an exterior environment. Ambient temperature range: Normal versions: -5°C to +25°C. Emergency versions: 0°C to +25°C. 230V 50Hz nominal input voltage.

Specification

A range of surface mounted IP65 vandal resistant amenity luminaires. Constructed from a cast aluminium round base, with opal or clear prismatic polycarbonate diffuser. This light is suitable for walkways, corridors, doorways, emergency exit routes, stairwells and external sheltered areas.

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
 F: 0161 274 3731
 E: sales@hilclare.com

15 Carnarvon Street
 Manchester
 M3 1HJ