

Paloma

Pendant High Bay



High and Low Bay



LED pendant with polycarbonate lexalite reflexor, grey gear housing black heat sink. Supplied with an adjustable 3m suspension kit. Powered by Tridonic's SLE system. Suitable for use in retail outlets, shops, churches and other decorative areas.

Adjustable 3m suspension kit

High efficiency reflexor

3000K and 4000K versions

Optional conical lens available

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ

E&OE


Ordering information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
27W	DPP27T640GB	3.10	27	3841	121	IP20	50,000hr	5 year
41W	DPP37T640GB	3.10	41	4850	116	IP20	50,000hr	5 year


Code Builder

Dali dimming - Add DA
 Digital/switch dimming - Add DD
 Emergency - Add EM
 Self-test emergency - Add STEM
 Colour 3000K - Add 30
 Conical lens available

Dimensions

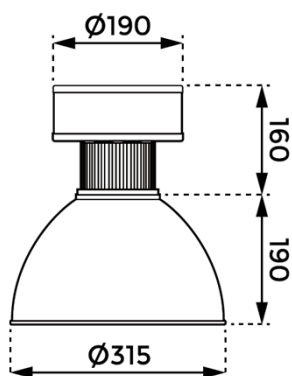

Photometrics

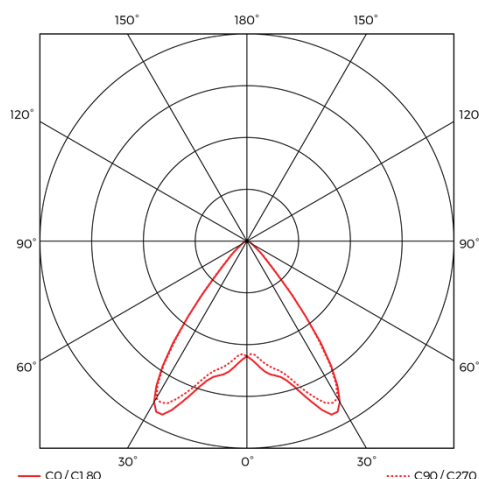

Classification of protection

Against electric shock Class I protected with earthed metalwork. Against ingress of dust and moisture IP20 Technical Specification.

Standards

The Paloma range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operations

Designed for operation in an interior environment. Ambient temperature range: 0°C to +25°C
 230V 50Hz nominal input voltage

Specification

LED pendant with polycarbonate lexalite reflexor, grey gear housing black heat sink. Supplied with an adjustable 3m suspension kit. Powered by Tridonic's SLE system. Suitable for use in retail outlets, shops, churches and other decorative areas.

Version 1.2 February 2019

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
 F: 0161 274 3731
 E: sales@hilclare.com

15 Carnarvon Street
 Manchester
 M3 1HJ

E&OE