

Perez

Linear, Batten



Corrosion Resistant



IP65 LED luminaires suitable for ceiling or suspension mounting in a wide variety of industrial and amenity applications, such as factories, warehouses and many other interior or exterior sheltered areas.

Single and twin size 4ft and 5ft versions available

Suitable for ceiling/suspension mounting

316 grade stainless steel clips as standard

Polycarbonate body and diffuser

30,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ

E&OE

Ordering Information


(Luminaires supplied c/w clear prismatic diffuser)

| | Code | Supply | Colour Temp. | Weight (kg) | Total Watts | Total Lumens | Luminaire Efficacy | Dim A (mm) | Dim B (mm) | IP Rating | Life | Warranty |
|-----|------------------|--------|--------------|-------------|-------------|--------------|--------------------|------------|------------|-----------|----------|----------|
| 24W | CRP2414LED5CP | 240V | 5000K | 2.5 | 24 | 2721 | 108 | 104 | 1266 | IP65 | 30,000hr | 3 year |
| 35W | CRP3515LED5CP | 240V | 5000K | 3.7 | 35 | 3900 | 108 | 104 | 1580 | IP65 | 30,000hr | 3 year |
| 48W | CRP4824LED5CP | 240V | 5000K | 5.0 | 48 | 5324 | 108 | 165 | 1266 | IP65 | 30,000hr | 3 year |
| 70W | CRP7025LED5CP | 240V | 5000K | 7.0 | 70 | 7711 | 108 | 165 | 1580 | IP65 | 30,000hr | 3 year |
| 33W | CRP3315LED5110CP | 110V | 5000K | 3.7 | 33 | 3900 | 108 | 104 | 1580 | IP65 | 30,000hr | 3 year |


Code Builder

Polycarbonate diffuser – Add CP
 Opal diffuser – Add OP
 Emergency – Add EM
 Microwave – Add MS9
 Microwave corridor version – Add MS9MD
 Self-test emergency – Add STEM
 Batten PIR sensor – Add MB

Dimensions



Photometrics

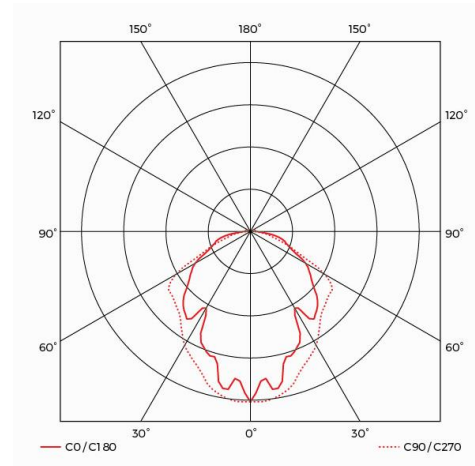

Classification of Protection

Against electric shock Class I protected with earthed metalwork. Against ingress of dust and moisture IP65 Technical Specification.

Standards

The Perez range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operation

Designed for operation in an interior or sheltered exterior environment. IP Rating is only valid when luminaires are horizontally mounted, diffuser downwards.

Ambient temperature range:
 0°C to +25°C.

230V 50Hz nominal input voltage.

Specification

IP65 LED luminaires suitable for ceiling or suspension mounting in a wide variety of industrial and amenity applications, such as factories, warehouses and many other interior or exterior sheltered areas.

Version 1.3 February 2019

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
 F: 0161 274 3731
 E: sales@hilclare.com

15 Carnarvon Street
 Manchester
 M3 1HJ